
## MONTE SERENO

## LOT 106

PHASE | \$ 2 SANTA FE, NEW MEXICO

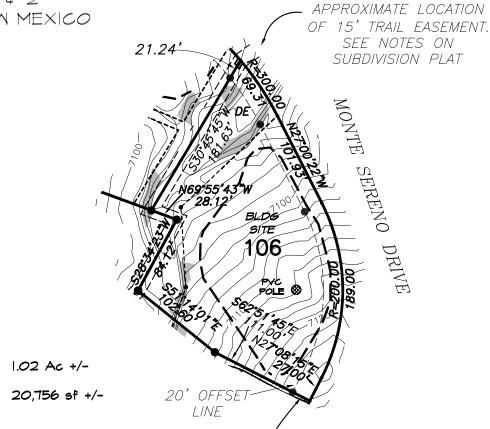

NOTES:

TOTAL LOT AREA:

BUILDING SITE :

I. DUE TO ROAD CONSTRUCTION, FRONT LOT CORNERS ARE OFFSET 20' FROM THE R.O.W. FRONT LOT CORNERS ARE REFERENCED BY A REBAR SET AT THE INTERSECTION OF SIDE LOT LINES WITH THE 20' OFFSET LINE SHOWN WITHIN THE LOT.

- 2. PURCHASERS SHOULD INSPECT ANY LOT AND REVIEW THE RECORDED SUBDIVISION PLAT TO VERIFY INDIVIDUAL LOT INFORMATION PRIOR TO ENTERING INTO A PURCHASE AGREEMENT AND PRIOR TO CONSTRUCTION.
- 3. ALL LOTS HAVE A REQUIRED SETBACK OF 10' ON ALL SIDES. IF GARAGE FACES ROAD, A 20' SETBACK IS REQUIRED.
- 4. BUILDING MAY TAKE PLACE ON ALL 'BUILDING SITES' OUTSIDE OF THE ESCARPMENT DISTRICT WITHOUT RESTRICTION.
- 5. 2' CONTOUR LINES INDICATED; NOTE THAT PROPERTY OWNER NEEDS TO FIELD VERIFY CONTOURS ALONG ROADWAYS.
- 6. NO DRIVEWAY SHALL EXCEED A GRADE OF 15%. IF THE DRIVEWAY GRADE EXCEEDS 10% OR IS LONGER THAN 150 FT. IN LENGTH, THEN THE HOMEOWNER SHALL BE REQUIRED TO INSTALL AN AUTOMATIC FIRE SUPPRESSION SYSTEM.

20.00'

LEGEND:

---- 20' OFFSET LINE

/ 'BUILDING SITE'



SLOPE 30% AND OVER




PNM EASEMENT (SEE PNM EASEMENT PLAN)

REBAR

IIIIIIIII DRAINAGE EASEMENT (DE)

## FLOOD ZONE:

THIS PROPERTY LIES WITHIN ZONE "X" AREAS DETERMINED TO BE OUTSIDE 500 YEAR FLOOD PLAIN AS SHOWN ON F.I.R.M. PANEL 350069-0175B, DATED 11-4-88



THIS IS NOT A SURVEY PLAT. SEE RECORDED SUBDIVISION PLATS FOR FURTHER INFORMATION THAT MAY AFFECT THIS LOT. RECORDED IN PLAT BOOK 586, PG. 48-50E.